



Drop wire clamp 5/35



Protection box to be clipped on 5/35

Function

Dead-ending and suspension of flat drop wires 5/9 et 5/99.
Qualified by France Telecom.

Allows :

- dead-ending of one drop wire (as the 5/35 product)
- the suspension of one drop wire (as the 5/36 product)
- the dead-ending of the drop wire + the protection of the connection (drop wire clamp with integrant box 5/35C).


Use

Dead-ending (5/35) and suspension (5/36) :

- Pass the free end of the plastic bail through the ring or cross-arm and lock the bail into the clamp body.
- Form a loop with the drop wire. Pass this loop through the stretched end of the clamp body. Place the clamp wedge into the loop.
- Adjust the drop wire load or sag by pulling the drop wire through the wedge of the clamp.

Drop wire clamp with protection box (5/35C) :

- Dead-end the drop wire as described before.
- Once the connection between the outdoor and indoor drop wires achieved, place the connectors into the protection box, clip both covers together and then clip the box onto the drop wire clamp 5/35.

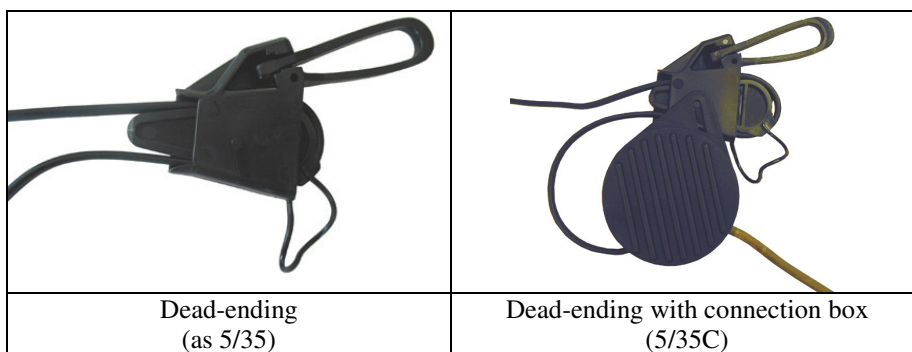

Characteristics

Telenco reference	EAN	Material	Min. failing load	Weight	Sales Unit
5/35	3411942013107	UV protected thermoplastic	160 daN	0,028 kg	200 units
5/35C	3411947686610			0,07 kg	100 units